GREENMAX™
INTCO RECYCLING


TOTAL SOLUTION TO
EPS/STYROFOAM RECYCLING

GREENMAX™ MELTER MARS

C50







> Three stages of temperature control manipulate output color as white as possible.


> Easy operation. No Additional adjustment required during operation. Just start and stop.

Compression Ratio:
90:1



5S

> Easy 5S, Less foam scraps blow out and scatter on the ground during operation.



> Screw melting technology enables continuous output at a ratio of 90:1. High-density ingot weights up to 25T per 40HQ container load.


PHOENIX CONTACT
Schneider Electric
NSK

> Equipped with reputable PHOENIX, SCHNEIDER, NSK components, GREENMAX ensures great safety, reliability and durability.


CE SP UL

> GREENMAX machines are CE approved and comply with UL/CSA standards.

> APPLICABLE MATERIAL:

POLYSTYRENE		POLYETHYLENE		POLYPROPYLENE
EPS/ EPS DUST	EPS CUPS&TRAYS/ XPS	EPE	EPE ROLL/ EPE SHEET	EPP
				

> DIMENSIONS

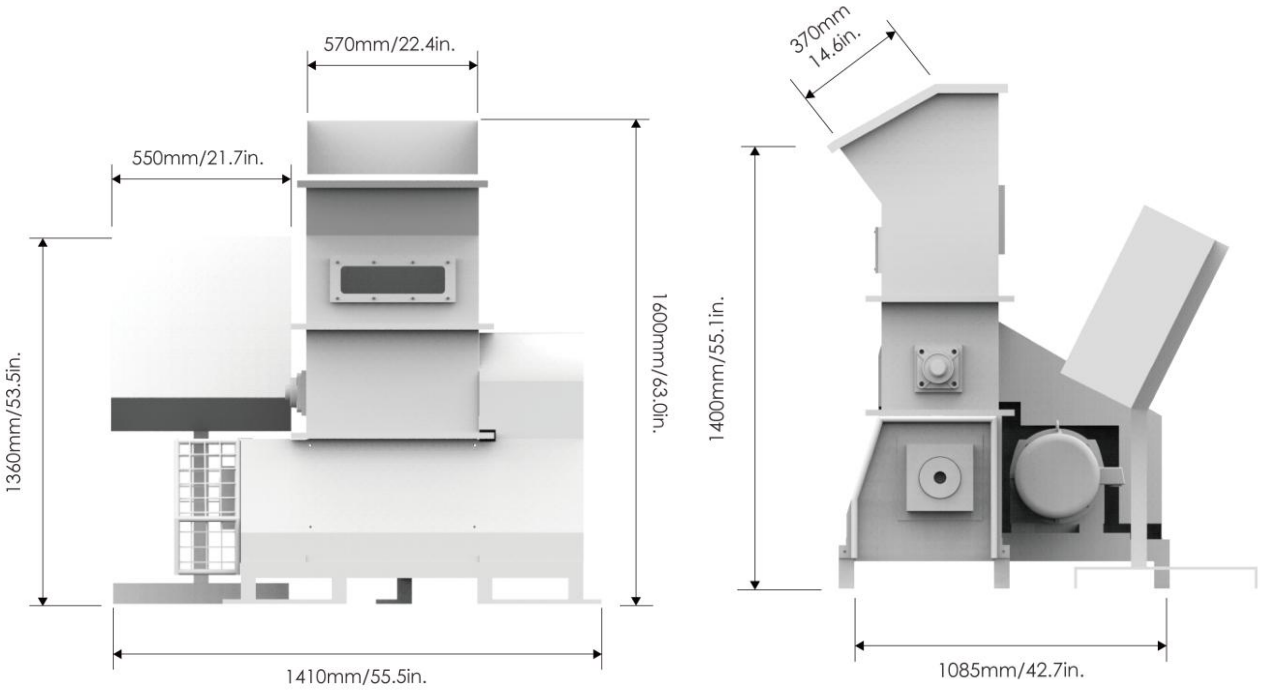

> TECHNICAL DATA

ITEM	M-C50
Motor Power	7.5 kw / 10.2 hp
Production Capacity	50 kg per hour / 110 lbs per hour
EPS Compression Ratio	90:1
Compressed EPS Density	600-800 kg/m^3 / 1320-1750 lbs/cubic yard
Feed Hopper Door	570*370 (l/w) mm / 22.4*14.6 (l/w) in.
Dimensions	1410*1085*1600 (l/w/h) mm / 55.5*42.7*63.0 (l/w/h) in.
Shipping Dimensions	1510*1185*1850 (l/w/h) mm / 59.4*46.7*72.8 (l/w/h) in.
Weight	650 kg / 1,430 lbs